






380 x 530 cm



44mm Thick Logs



18mm Doubled Windows

Gasket Sealed Windows & Doors

Tilt & Turn Feature 5 point locking system

28mm T&G Flooring 19mm T & G Roofing

Treated foundation Beams

Full Bespoke Service Available



DIMENSIONS

Dimensions (width x length) 3800 x 5300 mm Wall thickness 44 mm 2160 mm Wall height



WINDOWS & DOORS (DGP+*)

Windows and doors quality Gluelam timber with double-glazed units

Windows and doors dimensions and quantity 710x1260(x6), 1410x1930 mm



ROOF & FLOOR

Roof pitch 6/12°, 2410 mm (degree + Total cottage altitude)

Roof thickness 20 mm 20 mm Floor thickness Rafters dimensions & qty 70 x 150 mm, 4 units Front extension of the canopy 200 mm

22.6 m2 The area of a roof






400 x 520 cm



44mm Thick Logs



- 18mm Doubled Windows
- Tilt & Turn Feature
- 5 point locking system
- **Treated foundation Beams**



DIMENSIONS

4000 x 5200 mm Dimensions (width x length) Wall thickness 44 mm Wall height 2160 mm



WINDOWS & DOORS (DGP+*)

Windows and doors quality Gluelam timber with double-glazed units

Windows and doors dimensions and quantity 1410x1930, 710x1260(x3), 900x1930 mm



ROOF & FLOOR

Roof pitch 8°, 2425 mm (degree + Total cottage altitude)

Roof thickness 20 mm Floor thickness 20 mm Rafters dimensions & qty 70x150 mm, 3 units 200 mm Front extension of the canopy

The area of a roof 23.3 m2

28mm T&G Flooring

19mm T & G Roofing

Full Bespoke Service Available





320 x 410 cm

44mm Thick Logs




Under 2.5m



Roof Shingles Not Supplied



Roof Covering x2



18mm Doubled Windows

Tilt & Turn Feature

5 point locking system

Treated foundation Beams

Gasket Sealed Windows & Doors

28mm T&G Flooring

19mm T & G Roofing

Full Bespoke Service Available



DIMENSIONS

3100 x 4200 mm Dimensions (width x length) Wall thickness 44 mm Wall height 2160 mm



WINDOWS & DOORS (DGP+*)

Gluelam timber with double-glazed units 600x1930(x3), 1600x1930 mm



ROOF & FLOOR

Roof Slope 5°, 2437 mm Roof thickness 20 mm Floor thickness 20 mm Rafters dimensions & qty 50x150 mm, 3 units Front extension of the canopy 200 mm The area of a roof 17.6 m2






250 x 350 cm



44mm Thick Logs



- 18mm Doubled Windows
- Tilt & Turn Feature
- 5 point locking system
- **Treated foundation Beams**



DIMENSIONS

Dimensions (width x length) $2500 \times 3500 \text{ mm}$ Wall thickness 44 mm Wall height 2160 mm



WINDOWS & DOORS (DGP+*)

Windows and doors quality Gluelam timber with double-glazed units

Windows and doors dimensions and quantity 600x1930(x2), 1410x1930 mm



ROOF & FLOOR

Roof pitch 3°, 2300 mm (degree + Total cottage altitude)

Roof thickness 20 mm Floor thickness 20 mm Rafters dimensions & qty 50x150 mm, 2 units Front extension of the canopy 200 mm

The area of a roof 12.5 m2

_	•
	19mm T & G Roofing
	Full Bespoke Service Available

28mm T&G Flooring






380 x 530 cm



44mm Thick Logs





Tilt & Turn Feature

5 point locking system

Treated foundation Beams

Gasket Sealed Windows & Doors

28mm T&G Flooring

19mm T & G Roofing

Full Bespoke Service Available



DIMENSIONS

Dimensions (width x length) $3800 \times 5300 \text{ mm}$ Wall thickness 44 mm Wall height 2160 mm



WINDOWS & DOORS (DGP+*)

Windows and doors quality Gluelam timber with double-glazed units

Windows and doors dimensions and quantity 600x1930, 1000x1930, 1410x1930 mm



ROOF & FLOOR

Roof pitch 9°, 2440 mm (degree + Total cottage altitude)

Roof thickness 20 mm Floor thickness 20 mm Rafters dimensions & qty 70 x 150 mm, 3 units Front extension of the canopy 200 mm

The area of a roof 22.7 m2






380 x 530 cm



44mm Thick Logs



- 18mm Doubled Windows
- Tilt & Turn Feature
- 5 point locking system
- **Treated foundation Beams**



DIMENSIONS

Dimensions (width x length) $3800 \times 5300 \text{ mm}$ Wall thickness 44 mm Wall height 2160 mm



WINDOWS & DOORS (DGP+*)

Windows and doors quality Gluelam timber with double-glazed units

Windows and doors dimensions and quantity 600x1930, 1410x1930, 900x1930 mm



ROOF & FLOOR

Roof pitch 2°, 2298 mm (degree + Total cottage altitude)

Roof thickness 20 mm Floor thickness 20 mm Rafters dimensions & qty 70 x 150 mm, 4 units Front extension of the canopy 200 mm

The area of a roof 25.7 m2

$ \checkmark $	19mm T & G Roofing
	Full Bespoke Service Available

28mm T&G Flooring






380 x 530 cm



44mm Thick Logs



18mm Doubled Windows

Tilt & Turn Feature

5 point locking system

Treated foundation Beams

Gasket Sealed Windows & Doors

28mm T&G Flooring 19mm T & G Roofing

Full Bespoke Service Available



DIMENSIONS

Dimensions (width x length) $3800 \times 5300 \text{ mm}$ Wall thickness 44 mm Wall height 2160 mm



WINDOWS & DOORS (DGP+*)

Windows and doors quality Gluelam timber with double-glazed units

Windows and doors dimensions and quantity 900x1200(x3), 1410x1930 mm



ROOF & FLOOR

7/12°, 2437 mm Roof pitch (degree + Total cottage altitude)

Roof thickness 20 mm Floor thickness 20 mm Rafters dimensions & qty 70 x 150 mm, 4 units Front extension of the canopy 200 mm

22.7 m2 The area of a roof






280 x 380 cm



44mm Thick Logs



- 2 18mm Doubled Windows
- Tilt & Turn Feature
- 5 point locking system
- Treated foundation Beams



DIMENSIONS

Dimensions (width x length) 2800 x 3800 mm Wall thickness 44 mm Wall height 2160 mm



WINDOWS & DOORS (DGP+*)

Windows and doors quality Gluelam timber with double-glazed units

Windows and doors dimensions and quantity 710x1260(x2), 1410x1930 mm



ROOF & FLOOR

Roof pitch 7°, 2384 mm (degree + Total cottage altitude)

Roof thickness 20 mm
Floor thickness 20 mm
Rafters dimensions & qty 70 x 150 mm, 3 units
Front extension of the canopy 200 mm
The area of a roof 14.8 m2

Full Bespoke Service Available

19mm T & G Roofing






250 x 600 cm



44mm Thick Logs





Tilt & Turn Feature

5 point locking system

Treated foundation Beams

Gasket Sealed Windows & Doors

28mm T&G Flooring

19mm T & G Roofing

Full Bespoke Service Available



DIMENSIONS

2500 x 6000 mm Dimensions (width x length) Wall thickness 44 mm Wall height 2295 mm



WINDOWS & DOORS (DGP+*)

Windows and doors quality Gluelam timber with double-glazed units

Windows and doors dimensions and quantity 710x1260(x4), 1410x1930 mm



ROOF & FLOOR

Roof pitch 3°, 2435 mm (degree + Total cottage altitude)

Roof thickness 20 mm Floor thickness 20 mm Rafters dimensions & qty 50 x 150 mm, 5 units Front extension of the canopy 200mm Area of the roof 20.9m2






260x400 cm



44mm Thick Logs



18mm Doubled Windows

Gasket Sealed Windows & Doors

Tilt & Turn Feature

28mm T&G Flooring 19mm T & G Roofing

5 point locking system **Treated foundation Beams**

Full Bespoke Service Available



DIMENSIONS

Dimensions (width x length) 2660 x 4060 mm Wall thickness 44 mm Wall height 2160 mm



WINDOWS & DOORS (DGP+*)

Windows and doors quality Gluelam timber with double-glazed units

Windows and doors dimensions and quantity 600x1930, 1410x1930, 1100x1850 mm



ROOF & FLOOR

Roof pitch 3°, 2300 mm (degree + Total cottage altitude)

Roof thickness 20 mm Floor thickness 20 mm Rafters dimensions & qty 50 x 150 mm, 3 units Front extension of the canopy 200 mm

The area of a roof 13.8 m2






3160 x 3660mm



44mm Thick Logs



- 18mm Doubled Windows
- Tilt & Turn Feature
- 5 point locking system
- **Treated foundation Beams**

Gasket Sealed Windows & Doors

19mm T & G Roofing

28mm T&G Flooring

Full Bespoke Service Available



DIMENSIONS

3660 x 3160 mm Dimensions (width x length) Wall thickness 44 mm Wall height 2160 mm



WINDOWS & DOORS (DGP+*)

Windows and doors quality Gluelam timber with double-glazed units

Windows and doors dimensions and quantity 1410x1930 mm - 1 double door 600x1930mm - 1 single window



ROOF & FLOOR

7°, 2339 mm Roof pitch (degree + Total cottage altitude)

Roof thickness 20 mm Floor thickness 20 mm Rafters dimensions & qty 50 x 150 mm, 3 units Front extension of the canopy 200 mm

13.4 m2 The area of a roof






300 x 400 cm



44mm Thick Logs



- 18mm Doubled Windows
- Tilt & Turn Feature
- 5 point locking system
- **Treated foundation Beams**



DIMENSIONS

Dimensions (width x length) $3000 \times 4000 \text{ mm}$ Wall thickness 44 mm Wall height 2160 mm



WINDOWS & DOORS (DGP+*)

Windows and doors quality Gluelam timber with double-glazed units

Windows and doors dimensions and quantity 710x1260(x2), 1410x1930 mm



ROOF & FLOOR

Roof pitch 3°, 2298 mm (degree + Total cottage altitude)

Roof thickness 20 mm Floor thickness 20 mm Rafters dimensions & qty 50 x 150 mm, 3 units Front extension of the canopy 200 mm

The area of a roof 13.8 m2

lacksquare	19mm T & G Roofing
	Full Bespoke Service Available

28mm T&G Flooring






400 x 500 cm



44mm Thick Logs



- 18mm Doubled Windows
- Tilt & Turn Feature
- 5 point locking system
- **Treated foundation Beams**



DIMENSIONS

4000 x 5000 mm Dimensions (width x length) Wall thickness 44 mm Wall height 2160 mm



WINDOWS & DOORS (DGP+*)

Windows and doors quality Gluelam timber with double-glazed units

Windows and doors dimensions and quantity 710x1260(x2), 1410x1930 mm



ROOF & FLOOR

Roof pitch 7°, 2458 mm (degree + Total cottage altitude)

Roof thickness 20 mm Floor thickness 20 mm Rafters dimensions & qty 70 x 150 mm, 5 units 200 mm Front extension of the canopy 25.6 m2 The area of a roof

28mm T&G Flooring






4000 x 5000mm



44mm Thick Logs



- 2 18mm Doubled Windows
- Tilt & Turn Feature
- 5 point locking system
- Treated foundation Beams



DIMENSIONS

Dimensions (width x length) 4000 x 5000 mm Wall thickness 44 mm Wall height 2160 mm



WINDOWS & DOORS (DGP+*)

Windows and doors quality Gluelam timber with double-glazed units

Windows: 710x1260(x3)mm Doors: 1410x1930 mm



ROOF & FLOOR

Roof pitch 8°, 2425 mm (degree + Total cottage altitude)

Roof thickness 20 mm
Floor thickness 20 mm
Rafters dimensions & qty 70 x 150 mm, 3 units
Front extension of the canopy 200 mm
The area of a roof 22.4 m2

Gasket Sealed Windows & Doors

Full Bespoke Service Available

28mm T&G Flooring

19mm T & G Roofing



BESPOKE LOG CABINS

Create the log cabin of your dreams with our full bespoke service. It couldn't be simpler

1. Measurements

First step will be to take measurements of the area and size of your log cabin. Your log cabin will be manufactured to the exact size, so these need to be accurate. If you would prefer, we can come and measure them for you.



and state of the s

Log Cabin Design

Sketch out the layout of the desired log cabin, rooms, window positions, doors etc. This can be a rough sketch on a piece of scrap paper or a detailed drawing, we will produce the blueprints from your design.

3. Contact

Email your designs to us and one of our specialists will be in touch to go through the designs, suggest any changes and finalise the details, we will then draft up some official blueprints which we will send to you for approval or changes. Once approved we will require the initial payment. From there, your log cabin is sent to the warehouse to be manufactured.





Delivery & Fitting

When the log cabin has been manufactured, we will arrange a date and time with you for delivery and fitting.

It couldn't be simpler!


















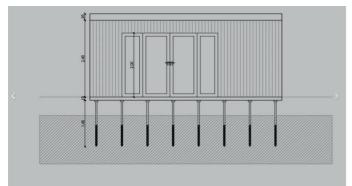







- +44 (0) 7467 426 774
- info@groundscrewsyorkshireltd.com
- www.groundscrewsyorkshireltd.com